

JUDOKA TIRES

MADE IN INDIA



toughest

SPEED SYMBOL & LOAD INDEX

DIMENSIONS AND TOLERANCES IN THIS CATALOGUE ARE BASED ON NOMINAL T & RAAND E.T.R. T. O
 THE LOAD INDEX IS A NUMERICAL CODE ASSOCIATED WITH THE MAXIMUM LOAD A TYRE CAN CARRY AT THE
 SPEED INDICATED BY ITS SPEED SYMBOL UNDER SERVICE CONDITIONS SPECIFIED BY THE MANUFACTURER.
 THE SPEED SYMBOL INDICATE THE MAXIMUM SPEED AT WHICH THE TYRE CA CARRY A LOAD
 CORRESPONDING TO ITS LOAD INDEX UNDER SERVICE CONDITIONS SPECIFIED BY THE MANUFACTURER.

LOAD INDEX	LOAD KG	LOAD INDEX	LOAD KG	LOAD INDEX	LOAD KG	SPEED SYMBOL	SPEED KM / H
102	850	141	2575	180	8000	A1	5
103	875	142	2560	181	8250	A2	10
104	900	143	2725	182	5000	A3	15
105	925	144	2800	183	8750	A4	20
106	950	145	2900	184	9000	A5	25
107	975	146	3000	185	9250	A6	30
108	1000	147	3075	186	9500	A7	35
109	1030	148	3150	187	9750	A8	40
110	1060	149	3250	188	10000	B	50
111	1090	150	3350	189	10300	C	60
112	1120	151	3450	190	10600	D	65
113	1150	152	3550	191	10900	E	70
114	1180	153	3650	192	11200	F	80
115	1215	154	3750	193	11500	G	90
116	1250	155	3875	194	11800	J	100
117	1285	156	4000	195	12150	K	110
118	1320	157	4125	196	12500	L	120
119	1360	158	4250	197	12850	M	130
120	1400	159	4375	198	13200	N	140
121	1450	160	4500	199	13600	P	150
122	1500	161	4625	200	14000	Q	160
123	1550	162	4750	201	14500	R	170
124	1600	163	4875	202	15000	S	180
125	1650	164	5000	203	15500		
126	1700	165	5150	204	16000		
127	1750	166	5300	205	16500		
128	1800	167	5450	206	17000		
129	1850	168	5600	207	17500		
130	199	169	5800	208	18000		
131	1950	170	6000	209	18500		
132	2000	171	5150				
133	2060	172	5300				
134	2120	173	6500				
135	2180	174	6700				
136	2240	175	6900				
137	2300	176	7100				
138	2360	177	7300				
139	2430	178	7500				
140	2500	179	7750				

SAFETY WARNING

"EXPLOSION OF TIRE / WHEEL / RIM ASSEMBLY DUE TO IMPROPER MOUNTING – NEVER EXCEED 35 PSI (AIR PRESSURE) WHEN SEATING BEADS. – ALWAYS USE SAFETY CAGE OR OTHER RESTRAINING DEVICE AND CLIP - ON EXTENSION HOSE. ONLY SPECIALLY TRAINED PERSONS SHOULD MOUNT TIRES.

R3 FOR TRACTORS REAR

judoka



ST-136

23.1-26

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Type	Load Capacity		
				Section Width (mm)	Overall Diameter (mm)				30 km/h		
									A6 Load Index	Max Load (kgs)	Inflation Pressure Bar
23.1-26	12	ST-136	20	587	1560	690	4545	TL	153	3650	1.7
23.1-26	16	ST-136	20	587	1560	690	4545	TL	159	4375	2.3

GRADER TYRES (G-2)



ST-136

13.00-24
14.00-24

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Type	Load Capacity	
				Section Width (mm)	Overall Diameter (mm)				40 km / h	
									Max Load (kgs)	Inflation Pressure Bar
13.00-24	12	ST-136	8	336	1282	584	4012	TL	2725	3
13.00-24	14	ST-136	8	336	1282	584	4012	TL	3020	3.25
13.00-24	16	ST-136	8	336	1282	584	4012	TL	3250	3.75
14.00-24	12	ST-136	8	362	1348	615	4235	TL	3075	2.5
14.00-24	14	ST-136	8	362	1348	615	4235	TL	3400	3.75
14.00-24	16	ST-136	8	362	1348	615	4235	TL	3650	3.5

INDUSTRIAL (R-4)



ST-136

16.9-24
17.5L-24
19.5L-24
16.9-28
18.4-26

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Type	Load Capacity		
				Section Width (mm)	Overall Diameter (mm)				30 km / h		
									A-6 Load Index	Max Load (kgs)	Inflation Pressure Bar
16.9-24	12	ST-136	15	440	1310	590	3850	TL	149	3250	2.6
17.5L-24	12	ST-136	15	445	1270	560	3680	TL	148	3450	2.7
19.5L-24	12	ST-136	17	490	1325	585	3840	TL	151	3450	2.3
16.9-28	12	ST-136	15	440	1410	640	4145	TL	152	3550	2.6
18.4-26	14	ST-136	16	472	1425	628	4190	TL	159	4375	2.9

AGRICULTURAL IMPLEMENT TYRES

judoka



ST 128

10.5/80-18
12.5/80-18



ST 201

400/60-15.5



ST 129

10.0/75-15.3
11.5/80-15.3
12.5/80-15.3
10.0/80-12
13.0/65-18
10.5/65-16
7.00-12



ST 129-A

10.0/75-15.3
11.5/80-15.3

Tyre Size	Ply Rating	Pattern	Unloaded Inflation Dimension +/-2%		Overall Diameter (mm)	Static Loaded Radius (mm)	Rolling circumference +/- 2.5% (mm)	Type	Load Capacity Free Rolling Wheel					
			Rim Width (inch)	Section Width (mm)					30 km/h			40 km/h with HLW		
									A-B Load Index	Max Load (kgs)	Inflation Pressure Bar	A-B Load Index	Max Load (kgs)	Inflation Pressure Bar
10.5/80-18	10	ST 128	9	272	909	405	2655	TT	138	2360	5.1	131	1950	4.7
10.5/80-18	8/9	ST 128	9	272	909	405	2655	TT	124	1600	4.2	119	1360	4
10.5/80-18	10	ST 128	9	272	909	405	2655	TT	128	1800	5.2	123	1550	5
12.5/80-18	12	ST 128	9	306	989	438	2890	TT	148	3150	5	142	2650	4.7
10.0/75-15.3	12	ST 129/129-A	9	272	762	343	2229	TT	132	2000	6.4	126	1700	6
10.0/75-15.3	14	ST 129/129-A	9	272	762	343	2229	TT	136	2240	7.5	120	1900	7
10.0/75-15.3	18/9	ST 129/129-A	9	272	762	343	2229	TT	142	2650	7.1	138	2360	7.1
10.0/75-15.3	10	ST 129/129-A	9	272	762	343	2229	TT	137	2300	4.6	131	1950	4.5
10.0/75-15.3	12	ST 129/129-A	9	272	762	343	2229	TT	141	2575	5.6	135	2180	5.25
11.5/80-15.3	14	ST 129/129-A	9	296	846	370	2474	TT	145	2900	6.5	139	2430	6.25
11.5/80-15.3	16	ST 129/129-A	9	296	846	370	2474	TT	147	3075	7.4	141	2575	7
11.5/80-15.3	18/9	ST 129/129-A	9	296	846	370	2474	TT	149	3250	8	145	2900	7.8
12.5/80-15.3	14	ST 129	9	310	888	387	2590	TT	147	3075	5.8	142	2650	5.5
11.5/80-15.3	16	ST 129	9	310	868	387	2590	TT	150	3350	6.5	144	2800	6.3
400/60-15.5	14	ST 201	13	400	875	385	2575	TT	141	2500	3.5	144	2800	3.5
10.0/80-12	10	ST 129	7/9	265	710	315	2085	TT	121	1450	3.9	117	1285	3.9
7.00-12	6	ST 129	5.5	200	667	-	628	TL	-	-	-	-	487	2.5
10.5/65-16	14	ST 129	9	274	755	-	860	TL	-	-	-	118	1320	5.3
13.0/65-18	14	ST 129	11	336	890	-	1056	TL	-	-	-	141	2575	4.3

SKIDSTEER TYRES



ST 134

10-16.5
12-16.5
14-17.5
15-19.5

Tyre Size	Ply Rating	Pattern	Unloaded Inflation Dimension +/-2%				Tube Type	Load Capacity 30 km/h	
			Rim Width (inch)	Section Width (mm)	Overall Diameter (mm)	Tread Depth (mm)		Max Load (kgs)	Inflation Pressure Bar
10-16.5	8	ST 134	8.25	270	776	14.5	TT	1680	4.1
10-16.5	10	ST 134	8.25	270	776	14.5	TT	2135	5.2
10-16.5	12	ST 134	8.25	270	776	14.5	TT	2375	6.2
12-16.5	10	ST 134	9.75	312	825	17	TT	2540	4.5
12-16.5	12	ST 134	9.75	312	825	17	TT	2885	5.5
12-16.5	14	ST 134	9.75	312	825	17	TT	3075	6.2
14-17.5	12	ST 134	10.50	352	932	22	TT	3430	4.5
14-17.5	14	ST 134	10.50	352	932	22	TT	3875	5.5
15-19.5	14	ST 134	11.75	389	1035	28	TT	4560	4.8
15-19.5	14	ST 134	11.75	389	1035	28	TT	4935	5.5

FORKLIFT TYRES



ST 190

5.00-8
18x7-8
6.00-9
6.50-10
700-12
700-15
7.50-15
825-15
28x9-15
300-15
12.00-20

Tyre Size	Ply Rating	Pattern	Unloaded Inflation Dimension +/-2%		Tubes	Valve	Flap	Rolling circumference +/- 2.5% (mm)	Load Capacity							
			Rim Width (inch) Rec. / Alt.	Section Width (mm)					Overall Diameter (mm)	Forklift Truck upto 25 km/h		Other vehicles		Side Load	Inflation Pressure (+/- 15%) Bar	
										Load Wheel	Steer Wheel	10 km/h	25 km/h			Static 0km/h
5.00-8	8	ST 190	3.000/3.250	138	480	5.00-8	J62	5.00-8	1235	1235	950	1235	950	1435	8.25	
18x7-8	16	ST 190	4.330/5.00	175	474	18x7-8	V3-02-06	18x7-8	2145	2145	1650	2145	1650	2490	10	
6.00-9	10	ST 190	4.000/5.00	172	552	6.00-9	J52	6.00-9	1715	1715	1320	1715	1320	1995	8.5	
6.50-10	10	ST 190	5.000/5.500	187	607	6.50-10	J52	6.50-10	1950	1950	1500	1950	1500	2265	7.75	
7.00-12	14	ST 190	5.000/5.500	192	672	7.00-12	TR-75A	7.00-12	2755	2755	2120	2755	2120	3000	9	
7.00-15	12	ST 190	5.5-5	202	754	7.00-15	TR-75A	7.00-15	3070	3070	2360	3070	2360	3565	8.25	
7.50-15	14	ST 190	6.5-5	222	787	7.50-15	TR177A	7.00-15	3640	3640	2800	3640	2800	4320	9.25	
825-15	14	ST 190	6.5-6	240	855	7.50-15	TR1177	8.25-15	4225	4225	3250	4225	3250	4910	8	
28x9-15	14	ST 190	7-6	220	720	8.15-15	TR75A	8.25-15	3770	3770	2900	3770	2900	4380	9	
300-15	18	ST 190	8-8	300	840	300-15	TR-75A	300-15	2500	2500	5625	4500	5850	4500	7.5	
300-15	20	ST 190	8-8	300	840	300-15	TR-75A	300-15	2500	2500	6230	4500	6500	5000	8.075	10
12.00-20	14,16,20, 24,28	ST 190	8.5	315	1146	12.00-20	TR-75A	12.00-20	-	6560	5540	7290	5540	9030	6.6	

REAR TRACTOR (R1 - R2) & IRRIGATION

judoka



Size	Ply Rating	Pattern	Unloaded Inflation Dimension +/-2%		Overall Diameter (mm)	+/- 2.5% Rolling Circum	Static Loaded Radius (mm)	Tube Type	Load Capacity 30 km/h		
			Rim Width (inch)	Section Width (mm)					A-6 Load Index	Max Load (kgs)	Inflation Pressure Bar
7.50-16	8	ST-143	6	214	803	2393	372	TT	119	1360	4.15
8.3-24	6	ST-143	W7	211	995	3124	-	TT	102	825	2.4
9.5-24	8	ST-143	W8	241	1050	3297	-	TT	112	1120	2.8
11.2-24	8	ST-143	10	286	1102	3249	515	TT	116	1250	2.4
12.4-24	8	ST-143	11	316	1158	3410	539	TT	121	1450	2.3
13.6-24	8	ST-143	12	347	1212	3557	560	TT	122	1500	1.9
14.9-24	8	ST-143	13	379	1268	3719	583	TT	128	1800	1.8
15.5/80-24	14	ST-143	13	394	1262	3965	-	TT	148	3150	3.5
16.0/70-20	14	ST-143	14	418	1097	3444	-	TT	142	2650	3.5
16.9-24	8	ST-143	15	431	1337	3925	613	TT	133	2060	1.7
14.9-26	8	ST-143	13	378	1295	4066	-	TT	127	1750	1.6
18.4-26	12	ST-143	16	467	1450	4550	-	TT	146	3000	2.3
11.2-28	8	ST-143	10	284	1205	3543	565	TT	118	1320	2.4
12.4-28	8	ST-142,143	11	318	1272	3748	598	TT	123	1550	2.3
12.4-28	12	ST-142, 143	11	318	1272	3748	598	TT	125	1650	2.5
13.6-28	8	ST-142, 143	12	345	1309	3851	610	TT	125	1650	2
14.9-28	8	ST-142, 143	13	378	1365	4013	634	TT	129	1880	1.8
14.9-28	10	ST-142, 143	13	378	1365	4013	634	TT	132	2020	2.1
14.9-28	12	ST-142, 143	13	378	1365	4013	634	TT	134	2120	2.3
16.9-28	10	ST-142, 143	15	432	1436	4220	649	TT	139	2430	2
16.9-28	12	ST-142, 143	15	432	1436	4220	649	TT	143	2725	2.4
16.9-30	8	ST-143	15	432	1483	4366	688	TT	137	2300	1.7
18.4-30	8	ST-143	16	469	1548	4557	716	TT	135	2180	1.4
18.4-30	12	ST-143	16	469	1548	4557	716	TT	149	3250	2.3
16.9-34	8	ST-143	15	431	1587	4660	738	TT	134	2130	1.7
18.4-34	8	ST-143	16	469	1652	4851	766	TT	137	2300	1.4
18.4-34	10	ST-143	16	469	1652	4851	766	TT	139	2415	1.5
11.2-38		ST-143	W10	288	1475	4630	-	TT	121	1450	1.6
13.6-38	10	ST-143	12	345	1570	4930	-	TT	136	2240	2.5
15.5-38	10	ST-143	14	397	1587	4660	746	TT	133	1840	1.9
16.9-38	8	ST-143	15	431	1687	4954	788	TT	136	2240	1.7
18.4-38	8	ST-143	16	469	1752	5145	816	TT	139	2430	1.4
18.4-38	12	ST-143	16	469	1752	5145	816	TT	149	3250	2.2



FLOTATION TYRES

judoka



ST-191



ST-191-A

Tyre Size	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Ply Rating	Type	Load Capacity											
			Section Width (mm)	Overall Diameter (mm)					Free Rolling Wheel			Drive Wheel								
									40 km/h		50 km/h		40 km/h		50 km/h					
									Load Index	Max Load (kgs)	Inflation Pressure Bar	Load Index	Max Load (kgs)	Inflation Pressure Bar	Load Index	Max Load (kgs)	Inflation Pressure Bar	Load Index	Max Load (kgs)	Inflation Pressure Bar
400/55-22.5	ST-191	11.75	407	1020	445	2955	14	TL	150	3350	3.5	146	3000	3.5	138	2360	3.5	134	2120	3.5
400/55-22.5	ST-191	11.75	407	1020	445	2955	16	TL	152	3550	4	148	31450	4	140	2500	4	136	2240	4
400/60-22.5	ST-191	11.75	400	1070	475	3092	16	TL	156	4000	3.5	149	3200	3.5	144	2800	3.5	136	2240	3.5
385/65-22.5	ST-191	11.75	407	1070	475	3092	18	TL	160	4500	4.3	153	3600	4.3	148	3150	4.3	140	2500	4.3
500/45-22.5	ST-191	16	500	1015	442	2935	12	TL	148	3150	2.7	144	2800	2.7	136	2240	2.7	132	2000	2.7
500/45-22.5	ST-191	16	500	1015	442	2935	16	TL	154	3750	3.6	150	3350	3.6	142	2650	3.6	138	23690	3.6
500/50-22.5	ST-191	16	500	1070	475	3092	16	TL	158	4250	3	155	3875	3	146	3000	3	142	2650	3
500/60-22.5	ST-191	16	500	1070	510	3380	16	TL	163	4875	3.2	159	4375	3.2	151	3450	3.2	148	3150	3.2
550/45-22.5	ST-191	12	550	1070	475	3092	16	TL	153	3650	2.1	150	3350	2	144	2800	2.2	141	2575	2
550/45-22.5	ST-191	16	550	1070	475	3092	16	TL	159	4375	2.8	156	4000	2.8	147	3075	2.8	144	2800	2.8
550/50-22.5	ST-191	16	550	1230	540	3555	12	TL	160	4500	2.1	156	4000	2.1	148	3150	2.1	144	2800	2.1
550/60-22.5	ST-191	16	550	1230	540	3555	12	TL	160	4500	2.3	157	4125	2.1	160	4500	2.3	154	3750	2
550/60-22.5	ST-191	16	550	1230	540	3555	16	TL	166	5300	3	163	4875	2.8	166	5300	3	162	4750	2.2
560/60-22.5	ST-191A	16	565	1250	550	3650	12	TL	167	5450	3.3	164	5000	3	164	5000	3	161	4625	2.8
560/60-22.5	ST-191A	16	565	1250	550	3650	16	TL	170	5800	3.5	169	5800	3.7	169	5800	3.7	166	5300	3.4
560/60-22.5	ST-191A	16	565	1250	550	3650	16	TL	175	6900	3.7	172	6300	4	172	6300	4	169	5800	3.5
600/50-22.5	ST-191	20	600	1170	510	3380	12	TL	159	4375	2	156	4000	2	147	3075	2	144	2800	2
600/50-22.5	ST-191	20	600	1170	510	3380	16	TL	165	5150	2.6	161	4625	2.6	153	3650	2.6	149	3250	2.6
600/55-22.5	ST-191	20	600	1230	540	3555	12	TL	164	5000	2	160	4500	2	151	3450	2	148	3150	2
600/55-22.5	ST-191	20	600	1230	540	3555	16	TL	169	5800	2.6	166	5300	2.6	156	4000	2.6	153	3650	2.6
700/40-22.5	ST-191	24	700	1170	510	3380	12	TL	160	4500	1.7	157	4125	1.7	148	3150	1.7	144	2800	1.7
700/40-22.5	ST-191	24	700	1170	510	3380	16	TL	166	5300	2.2	162	4750	2.2	154	3750	2.2	150	3350	2.2
700/50-22.5	ST-191	24	700	1270	550	3670	12	TL	168	5600	1.8	164	5000	1.8	156	4000	1.8	153	3650	1.8
700/50-22.5	ST-191	24	700	1270	550	3670	16	TL	174	5700	2.4	170	6000	2.4	162	4750	2.4	158	4250	2.4
600/56-26.5	ST-191	20	600	1340	585	3870	12	TL	165	5150	2	161	4625	2	153	3650	2	149	3250	2
600/55-26.5	ST-191	20	600	1340	585	3870	16	TL	170	6000	2.6	167	5450	2.6	159	4375	2.6	156	4000	2.6
700/50-26.5	ST-191	24	700	1340	585	3870	12	TL	169	5800	1.8	165	5150	1.8	157	4125	1.8	154	3750	1.8
800/45-26.5	ST-191	24	700	1340	585	3870	16	TL	174	6700	2.4	170	6000	2.4	162	4750	2.4	158	4250	2.4
800/45-26.5	ST-191	28	800	1340	585	3870	12	TL	170	6000	1.7	167	5450	1.7	158	4250	1.7	155	3875	1.7
800/45-26.5	ST-191	28	800	1340	585	3870	16	TL	177	7300	2.2	173	6500	2.2	164	5000	2.2	160	4500	2.2
650/65-30.35	ST-191	20	650	1650	710	4770	12	TL	174	6700	1.7	170	6000	1.7	162	4750	1.7	158	4250	1.7
650/65-30.35	ST-191	20	650	1650	710	4770	16	TL	179	7750	2.2	175	6900	2.2	167	5450	2.2	163	4875	2.2
750/60-30.5	ST-191	24	750	1650	710	4770	12	TL	176	7100	1.7	172	6300	1.7	164	5000	1.7	160	4500	1.7
750/60-30.5	ST-191	24	750	1650	710	4770	16	TL	182	8500	2.2	179	7750	2.2	170	6000	2.2	167	5450	2.2
850/50-30.5	ST-191	28	850	1650	710	4770	12	TL	180	8000	1.5	176	7100	1.5	168	4600	1.5	164	5000	1.5
850/50-30.5	ST-191	28	850	1650	710	4770	16	TL	186	9500	2.2	182	8500	2.2	174	6700	2.2	170	6000	2.2



EARTHMOVER TYRES (L-2)

judoka



15.5-25
17.5-25
20.5-25
23.5-25
26.5-25

ST-192



Tyre Size	Ply Rating	Pattern	Unloaded Inflation Dimension +/-2%		Overall Diameter (mm)	Type	Max Load (kgs)	Inflation Pressure Bar	km / h	SS
			Rim Width (inch)	Section Width (mm)						
15.5-25	10	ST-192	12	395	1275	TL	2180	1.75	40	A8
15.5-25	12	ST-192	12	395	1275	TL	2650	2.25	40	A8
15.5-25	16	ST-192	12	395	1275	TL	2980	2.8	40	A8
17.5-25	12	ST-192	14	445	1350	TL	2900	2	40	A8
17.5-25	14	ST-192	14	445	1350	TL	3080	2.25	40	A8
17.5-25	16	ST-192	14	445	1350	TL	3350	2.75	40	A8
17.5-25	20	ST-192	14	445	1350	TL	3650	3.25	40	A8
20.5-25	12	ST-192	17	520	1490	TL	3550	1.75	40	A8
20.5-25	16	ST-192	17	520	1490	TL	4000	2.25	40	A8
20.5-25	20	ST-192	17	520	1490	TL	4500	2.75	40	A8
23.5-25	16	ST-192	19.5	595	1615	TL	5450	1.5	40	A8
23.5-25	20	ST-192	19.5	595	1615	TL	6000	2	40	A8
23.5-25	24	ST-192	19.5	595	1615	TL	6700	2.5	40	A8
20.5-25	16	ST-192	17	520	1492	TL	8250	3.5	10	A2
20.5-25	20	ST-192	17	520	1492	TL	9500	4.5	10	A2
20.5-25	24	ST-192	17	520	1492	TL	10300	5.25	10	A2
20.5-25	28	ST-192	17	520	1492	TL	11500	6.25	10	A2
23.5-25	16	ST-192	19.5	595	1617	TL	9500	3	10	A2
23.5-25	20	ST-192	19.5	595	1617	TL	10900	3.75	10	A2
23.5-25	24	ST-192	19.5	595	1617	TL	12500	4.75	10	A2
23.5-25	28	ST-192	19.5	595	1617	TL	13600	5.5	10	A2
20.5-25	16	ST-192	17	520	1492	TL	5450	2.8	50	B
20.5-25	20	ST-192	17	520	1492	TL	6000	3.3	50	B
20.5-25	24	ST-192	17	520	1492	TL	6700	4	50	B
20.5-25	28	ST-192	17	520	1492	TL	7500	4.75	50	B
23.5-25	16	ST-192	19.5	595	1617	TL	6150	2.3	50	B
23.5-25	20	ST-192	19.5	595	1617	TL	7300	3	50	B
23.5-25	24	ST-192	19.5	595	1617	TL	8000	3.5	50	B
23.5-25	28	ST-192	19.5	595	1617	TL	8700	4	50	B



EARTHMOVER TYRES (E-3)

judoka




ST-193



ST-194

1600-25
1800-25
20.5-25
23.5-25

1800-33

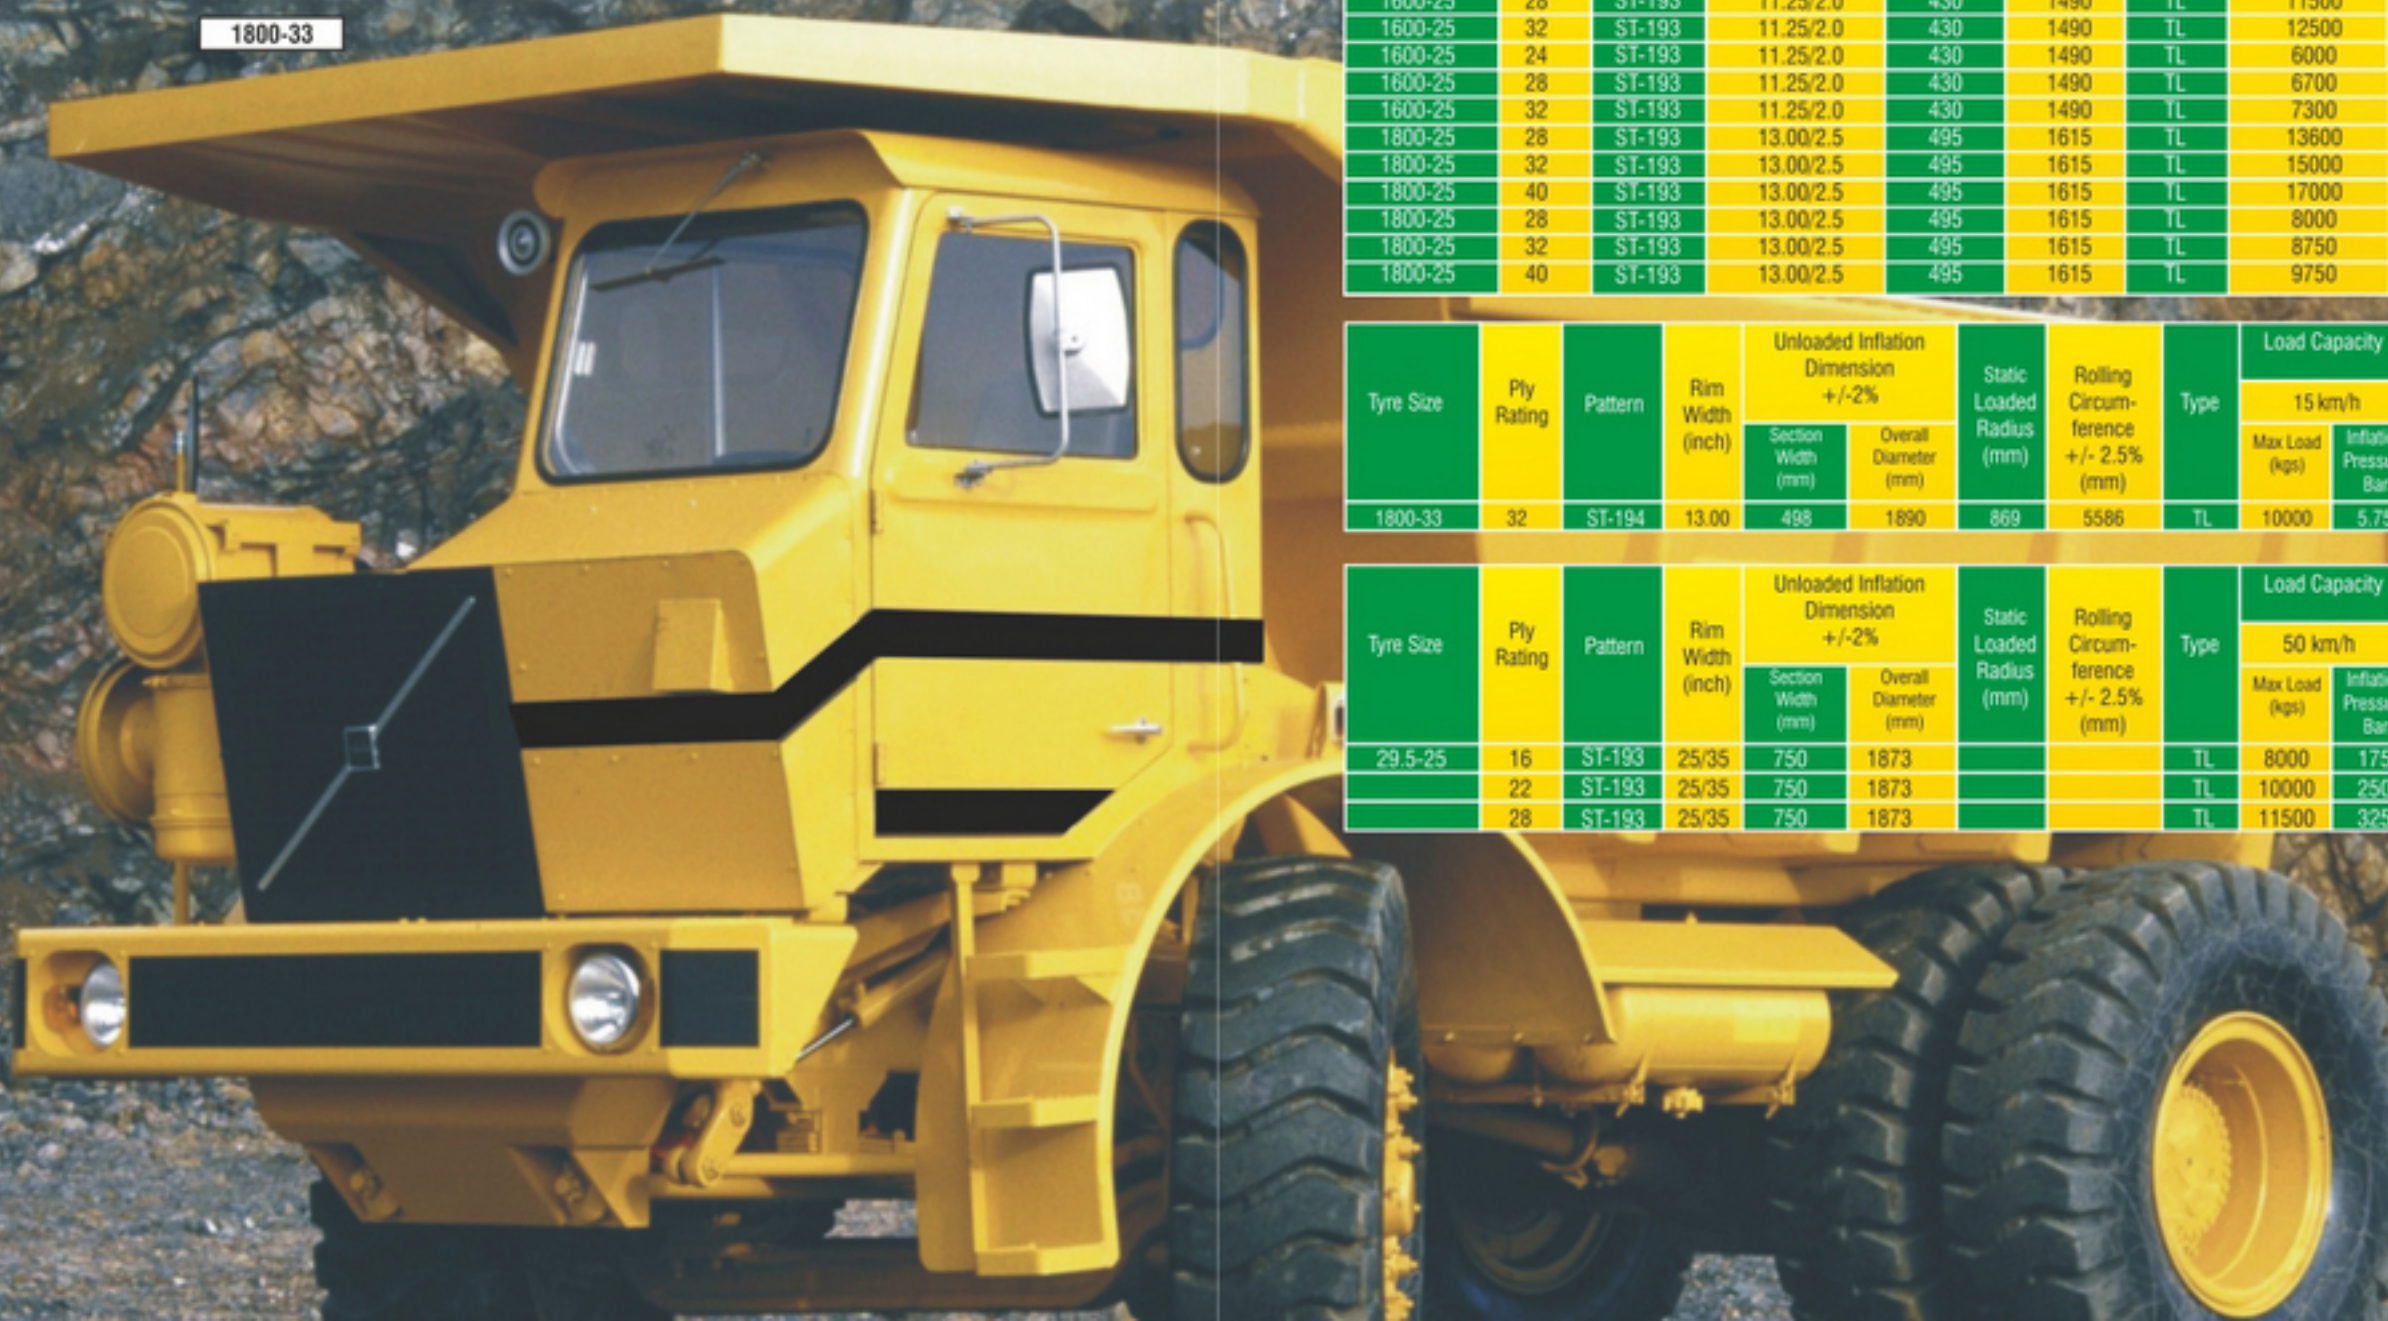

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Type	Max Load (kgs)	Inflation Pressure Bar	km / h	SS
				Section Width (mm)	Overall Diameter (mm)					
1600-25	24	ST-193	11.25/2.0	430	1490	TL	10600	650	10	A2
1600-25	28	ST-193	11.25/2.0	430	1490	TL	11500	650	10	A2
1600-25	32	ST-193	11.25/2.0	430	1490	TL	12500	650	10	A2
1600-25	24	ST-193	11.25/2.0	430	1490	TL	6000	475	50	B
1600-25	28	ST-193	11.25/2.0	430	1490	TL	6700	575	50	B
1600-25	32	ST-193	11.25/2.0	430	1490	TL	7300	650	50	B
1800-25	28	ST-193	13.00/2.5	495	1615	TL	13600	700	10	A2
1800-25	32	ST-193	13.00/2.5	495	1615	TL	15000	700	10	A2
1800-25	40	ST-193	13.00/2.5	495	1615	TL	17000	700	10	A2
1800-25	28	ST-193	13.00/2.5	495	1615	TL	8000	500	50	B
1800-25	32	ST-193	13.00/2.5	495	1615	TL	8750	575	50	B
1800-25	40	ST-193	13.00/2.5	495	1615	TL	9750	700	50	B

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Type	Load Capacity		Inflation Pressure		Tons Kilometer Per Hour (TKPH)
				Section Width (mm)	Overall Diameter (mm)				15 km/h		10km/h		
									Max Load (kgs)	Inflation Pressure Bar	Max Load (kgs)	Inflation Pressure Bar	
1800-33	32	ST-194	13.00	498	1890	869	5586	TL	10000	5.75	17500	7.50	219

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Type	Load Capacity		Inflation Pressure		Tons Kilometer Per Hour (TKPH)
				Section Width (mm)	Overall Diameter (mm)				50 km/h		10km/h		
									Max Load (kgs)	Inflation Pressure Bar	Max Load (kgs)	Inflation Pressure Bar	
29.5-25	16	ST-193	25/35	750	1873			TL	8000	175	12850	250	
	22	ST-193	25/35	750	1873			TL	10000	250	15000	325	
	28	ST-193	25/35	750	1873			TL	11500	325	17500	425	

TRACTOR FRONT TYRES

judoka



ST-137

- 6.00-16
- 7.50-16
- 9.00-16



ST-138

- 6.00-16
- 6.50-20
- 7.50-20
- 7.50-16



ST-139

- 5.00-15
- 11L-15SL
- 4.50-16
- 5.00-16
- 5.50-16
- 6.00-16
- 7.50-16
- 9.00-16
- 10.00-16
- 4.00-19
- 6.00-19
- 7.50-20



ST-140

- 10.00-16
- 11.00-16



ST-150

- 6.50/8-12
- 5-12

Tyre Size	Ply Rating	Pattern	Rim Width (inch)	Unloaded Inflation Dimension +/-2%		Static Loaded Radius (mm)	Rolling Circumference +/- 2.5% (mm)	Type	Inflation Pressure Bar	Load Capacity			
				Section Width (mm)	Overall Diameter (mm)					30 km/h		40 km/h	
										A6 Load Index	Max. Load (Kgs)	A8 Load Index	Max. Load (Kgs)
5.00-15	4	ST-139	4	142	659	307	1951	TT	2.8	73	365	65	260
6.50/8-12	6	ST-150	-	-	-	-	-	-	-	-	-	-	-
4.50-16	4	ST-139	3	124	657	311	1952	TT	3.1	73	365	65	260
5.00-16	6	ST-139	4	142	682	322	2025	TT	4.2	84	500	76	400
5.50-16	6	ST-137	4	156	722	340	2145	TT	3.7	86	525	78	370
5.50-16	6	ST-138	4	152	712	332	2116	TT	3.7	86	525	78	370
5.50-16	6	ST-139	4.5	172	748	350	2220	TT	3.3	86	525	78	370
6.00-16	8	ST-137	5.5	203	819	383	2220	TT	2.8	98	750	90	600
6.00-16	8	ST-138	5.5	209	807	379	2445	TT	2.8	98	750	90	600
6.00-16	8	ST-139	5.5	209	807	379	2445	TT	3.7	103	875	96	710
6.50-16	6	ST-138	4.5	182	767	359	2280	TT	3.1	91	615	83	340
7.50-16	8	ST-137	6	214	803	372	2393	TT	4.15	119	870	103	370
7.50-16	8	ST-138	6	214	803	372	2393	TT	4.15	119	870	103	370
7.50-16	8	ST-139	6	214	803	372	2393	TT	4.15	119	870	103	370
9.00-16	10	ST-139	8	239	857	398	2548	TT	3.9	116	1250	108	1000
10.00-16	8	ST-140	8	275	900	418	2682	TT	2.8	115	1215	107	975
10.00-16	10	ST-140	8	275	900	418	2682	TT	3.4	119	1360	111	1090
11.00-16	8	ST-140	10	320	970	448	2890	TT	2.5	118	1230	110	1060
7.50-18	8	ST-143	5.5	210	862	408	2650	TT	3.7	106	950	98	750
4.00-19	4	ST-139	3	117	717	343	2145	TT	2.4	72	355	64	260
6.00-19	6	ST-139	4.5	169	817	386	2445	TT	3.3	93	650	85	515
6.50-20	6	ST-138	4.5	177	867	409	2578	TT	3.1	97	730	89	560
7.50-20	8	ST-139	5.5	207	918	431	2745	TT	3.4	108	1030	101	825

FARM IMPLEMENT (I-1) AND TRAILER (F-3) Also available in High Speed



ST-186

- 9.5L-14SL
- 6.70-15SL
- 9.5L-15SL
- 11L-15SL
- 12.5L-15SL
- 7.50-16SL
- 9.00-16-SL
- 11L-16SL
- 12.5-16SL
- 11L-14
- 7.6L-15
- 11L-SL



ST-186

- 11L-16SL

Tyre Size	Ply Rating	Pattern	Unloaded Inflation Dimension +/-2%		Overall Diameter (mm)	Static Loaded Radius (mm)	Rolling circumference +/- 2.5% (mm)	Type	Load Capacity	
			Rim Width (inch)	Section Width (mm)					Max Load (kgs)	Inflation Pressure Bar
9.5L-14SL	8	ST-186	7	242	738	326	2152	TT	1090	3
6.70-15SL	6	ST-186	4.5	174	714	319	2080	TT	730	3
9.5L-15SL	8	ST-186	7	243	770	340	2246	TT	1150	2.5
11L-15SL	8	ST-186	8	268	772	342	2254	TT	1150	2.5
11L-15SL	10	ST-186	8	268	772	342	2254	TT	1320	3
12.5L-15SL	8	ST-186	10	308	822	364	2406	TT/TL	1360	2.5
12.5L-15SL	10	ST-186	10	308	822	364	2406	TT	1550	3.3
7.50-16SL	8	ST-186	5.5	204	786	348	2302	TT	1060	3.3
9.00-16-SL	10	ST-186	6	232	846	372	2477	TT	1500	3.6
11L-16SL	8	ST-186	8	268	798	356	2332	TT	1215	2.5
11L-16SL	10	ST-186	8	268	798	356	2332	TT	1360	3
12.5-16SL	8	ST-186	10	312	842	372	2478	TT	1400	2.5
12.5-16SL	12	ST-186	10	312	842	372	2478	TT	1800	3.6
11L-14	6	ST-186	8	279	752	319	2478	TT	925	1.2
7.6L-15	6	ST-186	5.5	193	734	290	2226	TT/TL	800	2.8
11L-14	8	ST-186	5.5	193	734	290	2226	TT/TL	950	3.6
11L-16SL	10	ST-187	8	279	830	384	2332	TL	1120	2.6
11L-16SL	12	ST-187	8	279	830	384	2332	TL	1250	4.4

TRACTOR PULLING TYRE



ST-700

24.5-32
30.5L-32

judoka

Pattern	SIZE	PLY RATING	RIM	Overall Width	Overall Dia	Static Loaded Radius	Rolling Circumference	Bar Height 32NDS	Bar Height inches	Flat plate	Wt LBS	Max Load & inflation pressure (Lbs @PSI)
ST - 700	24.5-32	HP	25	25.8	66.9	32	201	8	0.37	350	396	5200 @ 10
ST - 700	30.5L-32	HP	27	30.5	66.9	32	201	8	0.25	420	471	6950 @ 12

MOTOR CYCLE TYRE



ST-205



ST-206



ST-207



ST-208

2.75-17
2.75-18
2.75-18
3.00-18
3.00-17
3.00-18
100/90-18
100/90-17
3.00-14

Size	TT/TL	PATTERN	PATTERN	PR	WT(KGS)
2.75-17	TT	MC	ST-205	4	3
2.75-18	TT	MC	ST-205	4	3
2.75-18	TT	MC	ST-206	6	3
3.00-18	TT	MC	ST-206	6	4.1
3.00-17	TT	MC	ST-208	6	3.9
3.00-18	TT	MC	ST-208	6	4.1
100/90-18	TT	MC	ST-208	6	4.8
100/90-17	TT	MC	ST-207	6	4.6
3.00-14	TT	MC	ST-209	4	2.5

judoka *made in India*



JANAK GLOBAL ENTERPRISES INC.,

10668 New East Bay Rd#131

Gibsonton, FL 33534 - USA

email : sales@janakglobal.com

Website : www.janakglobal.com