



www.janakglobal.com

CATALOG **2023**



OVERLAND RTX

FOR THE ULTIMATE BALANCE OF DRIVABILITY AND OFF-ROAD CAPABILITIES

The Kanati Overland RTX was created for drivers of pickup trucks, CUVs, full-size SUVs, and jeeps who enjoy off-road adventures yet desire a smooth and comfortable ride on the highway. With over a decade of research and experience behind the Overland's optimized construction and reformulated rubber compound, it's Kanati's most advanced and best-performing tire to date. The Overland's multi-directional sipes are designed to boost traction and grip in both wet and dry conditions. An aggressive sidewall design offers extra biting edges when needed while adding an off-road curb appeal to your vehicle. At the same time, the balanced void ratio and open shoulder blocks provide reliable self-cleaning power to protect the tire's core from damage without sacrificing rider comfort.




Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/9th							
20	LOR2033125E	33X12.50R20LT	10PRV/LRE	18	32.9	12.4	10	61.1	80	114Q	2600
	LOR2035125E	35X12.50R20LT	10PRV/LRE	18	34.8	12.6	10	67.4	80	121Q	3195
	LOR2037125E	37X12.50R20LT	10PRV/LRE	18	36.9	12.8	10	73.6	80	126Q	3750
	LOR2037135E	37X13.50R20LT	10PRV/LRE	18	36.7	13.6	11	76.8	80	127Q	3860
22	LOR2233125E	33X12.50R22LT	10PRV/LRE	18	32.9	12.2	10	60.7	80	109Q	2270
	LOR2235125E	35X12.50R22LT	10PRV/LRE	18	34.8	12.4	10	66.8	80	117Q	2835
	LOR2237125E	37X12.50R22LT	10PRV/LRE	18	36.8	12.5	10	74.1	80	123Q	3415
	LOR2237135E	37X13.50R22LT	10PRV/LRE	18	36.8	13.6	11	76.9	80	123Q	3415

COMING SOON

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/9th							
16	LOR1624575E	LT245/75R16	10PRV/LRE	16	30.8	9.9 on 7	6-8	TBA	80	120/116Q	3042/2778
	LOR1726565E	LT265/65R17	10PRV/LRE	16	30.6	10.7 on 8	8-9.5	TBA	80	120/117Q	3065/2835
17	LOR1726665C	LT265/65R17	6PRV/LRC	16	30.6	10.7 on 8	5.5-7	TBA	50	109/105Q	2270/2040
	LOR1728570E	LT285/70R17	10PRV/LRE	16	32.8	11.5 on 8.5	7.5-9.5	TBA	80	123/120Q	3465/3120
	LOR1728570C	LT285/70R17	6PRV/LRC	16	32.8	11.5 on 8.5	7.5-9.5	TBA	50	116/113Q	2755/2535
	LOR1735125C	35x12.50R17LT	6PRV/LRC	18.9	34.7	12.8 on 10	8-10.5	TBA	35	111Q	2405
	LOR1735125E	35x12.50R17LT	10PRV/LRE	18.9	34.7	12.8 on 10	8-10.5	TBA	80	121Q	3195
	LOR1737125E	37x12.50R17LT	10PRV/LRE	18.9	36.7	13.1 on 10	8-10.5	TBA	80	124Q	3525
18	LOR1737125C	37x12.50R17LT	6PRV/LRC	18.9	36.7	13.1 on 10	8-10.5	TBA	35	116Q	2755
	LOR1826660E	LT265/60R18	10PRV/LRE	16	30.6	10.4 on 8	8-9.5	TBA	80	119/116Q	3000/2755
20	LOR2027555E	LT275/55R20	10PRV/LRE	16	31.9	11.1 on 8.5	8-9.5	TBA	80	120/117Q	3085/2835

- **ADVANCED RUBBER COMPOUND**
KANATI'S MOST ADVANCED RUBBER COMPOUND TO DATE PROVIDES LONG-LASTING EVEN WEAR
- **MULTI-DIRECTIONAL SIPES**
FOR EXCELLENT TRACTION IN WET AND DRY CONDITIONS
- **MULTI-ANGLED TREAD BLOCK DESIGN**
ENGINEERED FOR LOWER ROAD NOISE AND IMPROVED TRACTION
- **BALANCED VOID RATIO**
PROVIDES SELF-CLEANING POWER TO PROTECT TIRE FROM DAMAGE, WHILE PROMOTING A QUIET RIDE
- **REINFORCED SIDEWALL CONSTRUCTION**
PROVIDES SUPERIOR PUNCTURE RESISTANCE

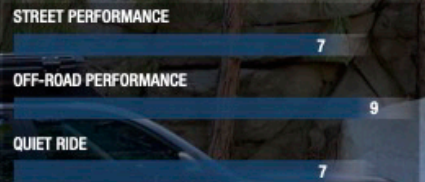



TERRA COMMANDER RTX

STREET PERFORMANCE
RUGGED OFF-ROAD LOOK

The Terra Commander RTX is the perfect companion for drivers who want a tire that can comfortably cruise the open highway and navigate light off-road conditions. The tread design of the Terra Commander features closely placed lugs that allow for greater contact on the road for a smooth ride and less road noise. Stone ejectors between the lugs help remove stubborn rocks and other debris, while the siped lugs provide extra flex and grip when adventuring off the beaten path. Combined with its broad shoulders and aggressive sidewall, the RTX gives your vehicle a rugged off-road look that others will envy. This new Kanati tire is more than capable of getting you through your daily excursions and back; all you have to do is decide which direction to travel.



Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Single/Dual	Lbs
17	LRX1723560E	LT235/80R17	10PR/LRE	16.1	31.7	8.9	6-8.5-7.5	47.2	80	120/117Q	3085/2835
	LRX1724570E	LT245/70R17	10PR/LRE	16.1	30.6	9.8	6.5-7-8	45.9	80	119/116Q	3000/2755
	LRX1724576E	LT245/75R17	10PR/LRE	16.1	31.5	9.5	6.5-7-7.5	48.0	80	121/118Q	3195/2910
	LRX1726570E	LT265/70R17	10PR/LRE	16.1	31.7	10.3	7-8-8.5	50.9	80	121/118Q	3195/2910
	LRX1726570E	LT285/70R17	10PR/LRE	16.1	32.9	11.1	7.5-8.5-9	55.8	80	121/118Q	3195/2910
	LRX1729570E	LT295/70R17	10PR/LRE	16.1	33.3	11.5	7.5-8.5-10	59.5	80	121/118Q	3195/2910
	LRX1730570E	LT305/70R17	10PR/LRE	16.1	33.9	12	8-9-9.5	61.2	80	121/118Q	3195/2910
	LRX1731570E	LT315/70R17	10PR/LRE	16.1	34.4	12.9	8.9-9-11	65.8	80	121/118Q	3195/2910
	LRX1733125E	33X12.50R17LT	10PR/LRE	18.4	32.8	12.5	8.5-10-11	62.3	80	120Q	3085
	LRX1735125E	35X12.50R17LT	10PR/LRE	18.4	34.8	12.7	8.5-10-11	68.9	80	121Q	3195
18	LRX1737125E	37X12.50R17LT	10PR/LRE	18.4	36.9	13	8.5-10-11	74.6	80	124Q	3525
	LRX1740135E*	40X13.50R17LT	8PR/LRD	18.9	39.5	13.6	9-11-11.5	TBA	50	128Q	3195
	LRX1826570E	LT265/70R18	10PR/LRE	16.1	32.6	10.3	7-8-9	53.5	80	124/121Q	3525/3195
	LRX1827566E	LT275/65R18	10PR/LRE	16.1	32.1	10.5	7.5-8-9	53.9	80	123/120Q	3415/3085
	LRX1827570E	LT275/70R18	10PR/LRE	16.1	33.1	11.0	7-8-9	56.5	80	125/122Q	3640/3305
	LRX1828570E	LT285/70R18	10PR/LRE	16.1	33.8	11.1	7.5-8.5-9.5	58.3	80	127/124Q	3860/3525
	LRX1829570E	LT295/70R18	10PR/LRE	16.1	34.3	11.6	8-8.5-10	63.8	80	129/126Q	4080/3750
	LRX1830570E	LT305/70R18	10PR/LRE	16.15	34.9	12.2	8.5-9-10	63.88	80	126/123Q	3750/3415
	LRX1835125E	35X12.50R18LT	10PR/LRE	18.4	34.7	12.6	8.5-10-11	68.5	80	123Q	3415
	LRX1837125E	37X12.50R18LT	10PR/LRE	18.4	36.9	12.7	8.5-10-11	73.2	80	128Q	3970
20	LRX2026560E	LT265/60R20	10PR/LRE	16.1	32.5	10.2	7.5-8-9.5	53.9	80	121/118Q	3195/2910
	LRX2027560E	LT275/60R20	10PR/LRE	16.1	33.1	10.4	7.5-8-9.5	55.2	80	123/120Q	3415/3085
	LRX2027565E	LT275/65R20	10PR/LRE	16.1	34.1	10.5	7.5-8-9.5	58.3	80	126/123Q	3750/3415
	LRX2028560E	LT285/60R20	10PR/LRE	16.1	33.5	11.1	8-8.5-10	59.4	80	125/122Q	3640/3305
	LRX2029560E	LT295/60R20	10PR/LRE	16.1	34.2	11.2	9-10-10	60.4	80	126/123Q	3750/3415
	LRX2032560E	LT325/60R20	10PR/LRE	16.1	35.3	13.0	9-9.5-12	67.5	80	126/123Q	3750/3415
	LRX2033125E	33X12.50R20LT	10PR/LRE	18.4	32.8	11.8	8.5-10-11	60.6	80	114Q	2600
	LRX2035125E	35X12.50R20LT	10PR/LRE	18.4	34.8	12.1	8.5-10-11	67.9	80	121Q	3195
	LRX2037125E	37X12.50R20LT	10PR/LRE	18.4	36.9	12.4	8.5-10-11	73.6	80	126Q	3750
	LRX2040135E*	40X13.50R20LT	10PR/LRE	18.9	39.5	13.6	9-11-11.5	TBA	65	128Q	3970

■ **OPTIMIZED VOID RATIO**
FOR A COMFORTABLE RIDE AND LOW NOISE

■ **3-PLY SIDEWALLS**
FOR ADDED STRENGTH AND STABILITY

■ **AGGRESSIVE SIDEWALL AND SHOULDER LUGS**
FOR A RUGGED OFF-ROAD LOOK

■ **STONE EJECTORS**
PROVIDE EASY CLEAN-OUT BETWEEN LUGS

■ **M+S RATED**

STREET PERFORMANCE

8

OFF-ROAD PERFORMANCE

7

QUIET RIDE

8

*Coming Soon



COMMANDANT ATX

SUPERIOR TRACTION & HEAVY-DUTY LOAD CAPACITY

The Kanati Commandant ATX is a perfect daily driver for light and heavy duty trucks or large SUVs. The Commandant has an aggressive tread pattern and bold shoulder lugs designed to boost a truck's appeal and aesthetics while providing traction and increased handling in various terrains and conditions.

The Commandant's design was rooted in our Armor Hog ATX tire, which supports HD pickups and heavy-duty applications; However, the Commandant is lighter than the Armor Hog and still offers a high load capacity at a reduced weight. The Commandant ATX provides drivers with a smooth and quiet ride, all while delivering the carrying capacity to pull harder and go further on or off the road.



Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
17	LCO1723560F	LT235/80R17	12PR/LRF	18	31.9	9.2 ON 6.5	6-7.5	52.64	95	123/120Q	3415/3085
	LCO1724570F	LT245/70R17	12PR/LRF	18	30.7	9.7 ON 7	6.5-8	52.30	95	122/119Q	3305/3000
	LCO1724575F	LT245/75R17	12PR/LRF	18	31.6	9.7 ON 7	6.5-7.5	54.65	95	124/121Q	3525/3195
	LCO1726570F	LT265/70R17	12PR/LRF	18	31.8	10.7 ON 8	7-8.5	56.99	95	126/123Q	3750/3415
	LCO1728570F	LT285/70R17	12PR/LRF	18	32.9	11.5 ON 8.5	7.5-9	62.37	95	129/126Q	4060/3750
	LCO1729570F	LT295/70R17	12PR/LRF	18	33.4	11.7 ON 8.5	7.5-10	64.54	95	129/126Q	4060/3750
	LCO1730570F	LT305/70R17	12PR/LRF	18	34.0	12.2 ON 9	8-9.5	67.37	80	129/126Q	4060/3750
	LCO1731570F	LT315/70R17	12PR/LRF	18	34.5	12.7 ON 9.5	8-11	70.42	80	129/126Q	4060/3750
	LCO1733125F	33X12.50R17LT	12PR/LRF	18	32.7	12.5 ON 10	8.5-11	65.17	80	124Q	3525
	LCO1735125F	35X12.50R17LT	12PR/LRF	18	34.7	12.5 ON 10	8.5-11	71.08	80	129Q	4060
LCO1737125F	37X12.50R17LT	12PR/LRF	18	36.7	12.5 ON 10	8.5-11	79.12	80	129Q	4060	
18	LCO1826570F	LT265/70R18	12PR/LRF	18	32.7	10.7 ON 8	7-9	60.86	95	127/124Q	3860/3525
	LCO1827565F	LT275/65R18	12PR/LRF	18	32.2	10.9 ON 8	7.5-9	59.37	95	127/124Q	3860/3525
	LCO1827570F	LT275/70R18	12PR/LRF	18	33.3	10.9 ON 8	7-9	62.77	95	129/126Q	4060/3750
	LCO1828570F	LT285/70R18	12PR/LRF	18	33.9	11.5 ON 8.5	7.5-9.5	66.85	95	129/126Q	4060/3750
	LCO1829570F	LT295/70R18	12PR/LRF	18	34.4	11.7 ON 8.5	8-10	69.14	95	129/126Q	4060/3750
	LCO1830570F	LT305/70R18	12PR/LRF	18	35.0	12.2 ON 9	8.5-10	71.50	80	129/126Q	4060/3750
	LCO1835125F	35X12.50R18LT	12PR/LRF	18	34.7	12.5 ON 10	8.5-11	71.67	80	128Q	3970
	LCO1837125F	37X12.50R18LT	12PR/LRF	18	36.7	12.5 ON 10	8.5-11	77.70	80	128Q	3970
20	LCO2026560F	LT265/60R20	12PR/LRF	18	32.7	10.7 ON 8	7.5-9.5	59.99	95	125/122Q	3640/3305
	LCO2027555F	LT275/55R20	12PR/LRF	18	33.3	10.8 ON 8.5	8.5	57.6	95	124/121Q	3525
	LCO2027560F	LT275/60R20	12PR/LRF	18	33.3	10.9 ON 8	7.5-9.5	61.59	95	127/124Q	3860/3525
	LCO2027565F	LT275/65R20	12PR/LRF	18	34.3	10.9 ON 8	7.5-9.5	64.16	95	129/126Q	4060/3750
	LCO2028560F	LT285/60R20	12PR/LRF	18	33.8	11.5 ON 8.5	8-10	66.08	95	129/126Q	4060/3750
	LCO2028560F	LT295/60R20	12PR/LRF	18	34.3	11.7 ON 8.5	8-10	68.80	95	129/126Q	4060/3750
	LCO2032560F	LT325/60R20	12PR/LRF	18	35.4	13 ON 9.5	9-12	76.47	80	129/126Q	4060/3750
	LCO2033125F	33X12.50R20LT	12PR/LRF	18	32.7	12.5 ON 10	8.5-11	66.17	80	119Q	3000
	LCO2035125F	35X12.50R20LT	12PR/LRF	18	34.7	12.5 ON 10	8.5-11	71.14	80	125Q	3640
	LCO2037125F	37X12.50R20LT	12PR/LRF	18	36.7	12.5 ON 10	8.5-11	77.48	80	128Q	3970
LCO2040135E	40X13.5R20LT	12PR/LRF	18	39.7	13.6 ON 11	9-11.5	TBA	80	129Q	4060	

■ **12-PLY RATED RADIAL CONSTRUCTION**
FOR GREATER LOAD CARRYING-CAPACITY


■ **3-PLY SIDEWALL**
FOR SUPERIOR PUNCTURE AND IMPACT RESISTANCE

■ **AGGRESSIVE ALL-TERRAIN TREAD**
FOR SUPERIOR TRACTION ON MULTIPLE TERRAINS

■ **ENGINEERED FOR HEAVY OR LIGHT DUTY TRUCKS AND LARGE 6-8 PASSENGER SUVs**

■ **QUIET AND SMOOTH RUNNING, PERFECT FOR YOUR DAILY DRIVER**

■ **M+S RATED**

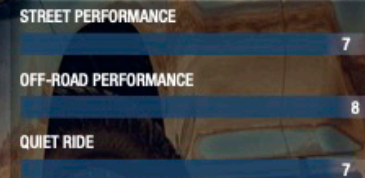



MUD HOG M/T

DESIGNED FOR OFF-ROAD PERFORMANCE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch							
15	L1531105C-252*	31X10.50R15LT	6PR/LRC	19	30.7	10.9 on 8.5	7-9	47.5	50	109Q	2270
	L1535105C-252*	LT35X10.50R15	6PR/LRC	20	34.7	10.5 on 8	10	62.0	50	118Q	2910
	L1535125C-252*	35X12.50R15LT	6PR/LRC	20	34.8	12.5 on 10	8.5-11	62.1	35	119Q	2535
16	L1623585E-252	LT235/85R16	10PR/LRE	18	32.0	9.3 on 6.5	6-7.5	50.9	80	120/116Q	3042/2778
	L1624575E-252	LT245/75R16	10PR/LRE	18	30.7	9.8 on 7	6.5-8	49.9	80	120/116Q	3042/2778
	L1626575E-252	LT265/75R16	10PR/LRE	18	31.9	10.5 on 7.5	7-8	54.2	80	123/120Q	3415/3085
	LH1628575E-252	LT285/75R16	10PR/LRE	19	33.0	11.3 on 8	7.5-9	60.1	80	126/123Q	3750/3415
	LH1630670E-252	LT306/70R16	10PR/LRE	20	33.1	12.2 on 9	8-9.5	64.8	65	124/121Q	3525/3195
	L1631575D-252*	LT315/75R16	8PR/LRD	20	34.8	12.3 on 8.5	8-11	63.7	50	121/118Q	3195/2910
17	L1726570C-252**	LT265/70R17	6PR/LRC	TBA	TBA	TBA	7-9	TBA	50	112/109Q	2470/2270
	L1726570E-252	LT265/70R17	10PR/LRE	18	31.9	10.7 on 8	7-8.5	54.2	80	121/118Q	3195/2910
	L1728570C-252**	LT285/70R17	6PR/LRC	TBA	TBA	TBA	7.5-9.5	TBA	50	116/113Q	2755/2535
	L1728570E-252	LT285/70R17	10PR/LRE	19	33.0	11.5 on 8.5	7.5-9	61.3	80	123/120Q	3465/3120
	L1729570C-252**	LT295/70R17	6PR/LRC	TBA	TBA	TBA	7.5-10	TBA	50	118/115Q	2910/2680
	L1729570E-252	LT295/70R17	10PR/LRE	19.7	33.5	11.8 on 8.5	7.5-10	60.9	80	121/118Q	3195
	L1730670E-252	LT306/70R17	10PR/LRE	19.7	34.1	12.3 on 9	8-9.5	65	80	121/118Q	3195
	L1731570C-252**	LT315/70R17	6PR/LRC	TBA	TBA	TBA	8-10.5	TBA	35	113/110Q	2535/2335
	L1731570E-252	LT315/70R17	10PR/LRE	19.7	34.6	12.7 on 9.5	8-11	65.6	80	121/118Q	3195
	L1733125C-252**	33X12.50R17LT	6PR/LRC	TBA	TBA	TBA	8.5-11	TBA	35	105Q	2040
	L1733125E-252	33X12.50R17LT	10PR/LRE	19	32.8	12.5 on 10	8.5-11	59.9	80	120Q	3085
	L1735125C-252**	35X12.50R17LT	6PR/LRC	TBA	TBA	TBA	8.5-10.5	TBA	35	111Q	2405
L1735125E-252	35X12.50R17LT	10PR/LRE	20	34.8	12.5 on 10	8.5-11	64.3	80	121Q	3195	
18	L1737125C-252**	37X12.50R17LT	6PR/LRC	TBA	TBA	TBA	8-10.5	TBA	35	116Q	2755
	L1737125E-252	37X12.50R17LT	10PR/LRE	19	36.8	12.5 on 10	8.5-11	72.8	80	124Q	3525
	L1739125E-252	39X12.50R17LT	10PR/LRE	21	38.8	12.8 on 10	8.5-11	85.0	65	128Q	3970
	L1740135C-252**	40X13.50R17LT	8PR/LRD	21	39.7	13.6 on 11	9-11.5	TBA	50	121Q	3195
	L1827565E-252	LT275/65R18	10PR/LRE	20	32.3	11.0 on 8	7.5-9	57.0	80	123/120Q	3415/3085
	L1827570E-252	LT275/70R18	10PR/LRE	19	33.4	10.9 on 8	7-8.5	59.0	80	125/122Q	3640/3305
	LH1830670E-252	LT306/70R18	10PR/LRE	20	35.1	12.2 on 9	8-10	67.4	80	126/123Q	3750/3415
	L1833125E-252	33X12.50R18LT	10PR/LRE	20	32.6	12.6 on 10	10	62.2	80	118Q	2910
	L1835125E-252	35X12.50R18LT	10PR/LRE	20	34.8	12.6 on 10	10	67.1	80	123Q	3415

*2-ply sidewall construction **Coming Soon

The Kanati Mud Hog M/T sports an aggressive tread pattern ready to take on mother nature. Whether its conquering mud or crawling over rocks, the Mud Hog is engineered to push the limits of your off-road adventure. You can confidently dominate any terrain with the Mud Hog's large void ratio for easy clean-out and wide footprint for superior traction and stopping power.



Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity Single/Dual
				32nd/Inch							
20	L2027560E-252	LT275/60R20	10PR/LRE	20	33.0	11 on 8	9	59.1	80	123/120Q	3415/3085
	L2027565E-252	LT275/65R20	10PR/LRE	19	34.3	11 on 8	7.5-9.5	60.0	80	126/123Q	3750/3415
	L2029560E-252	LT295/60R20	10PR/LRE	20	34.0	12 on 8.5	8-10	66.1	80	126/123Q	3750/3415
	L2033125E-252	33X12.50R20LT	10PR/LRE	19	32.7	12.5 on 10	8.5-11	61.4	80	114Q	2600
	L2035125E-252	35X12.50R20LT	10PR/LRE	20	35.0	12.5 on 8.5	8.5-11	66.6	80	121Q	3195
	L2037125E-252	37X12.50R20LT	10PR/LRE	20	37.0	12.5 on 10	8.5-11	71.5	80	126Q	3750
	L2039135E-252	39X13.50R20LT	10PR/LRE	21	38.8	13.6 on 11	8.5-11	83.8	65	128Q	3970
	L2040135E-252**	40X13.50R20LT	10PR/LRE	21	39.7	13.6 on 11	9-11.5	TBA	65	128Q	3970
	L2235125E-252	33X12.50R22LT	10PR/LRE	20	32.8	12.5 on 10	8.5-11	60.3	80	109Q	2270
	L2237135E-252	37X13.50R22LT	10PR/LRE	20	36.8	13.6 on 11	8.5-11	75.0	80	123Q	3415
L2239145E-252	39X14.50R22LT	10PR/LRE	21	38.8	14.6 on 12	10-12	87.0	65	128Q	3970	

- **AGGRESSIVE ANGLED TREAD**
DELIVERS ENHANCED TRACTION IN OFF-ROAD CONDITIONS
- **3-PLY SIDEWALLS**
FOR INCREASED STRENGTH AND IMPACT RESISTANCE
- **OPTIMIZED VOID RATIO**
FOR SUPERIOR SELF-CLEANING ACTION
- **BUILT WITH RESILIENT RUBBER COMPOUNDS**
FOR EVEN TREAD WEAR AND DURABILITY
- **M+S RATED**

STREET PERFORMANCE

6

OFF-ROAD PERFORMANCE

10

QUIET RIDE

5





TRAIL HOG A/T-4

ALL-TERRAIN / ALL-WEATHER
SUPERIOR TRACTION

The Kanati Trail Hog A/T-4 is a true all-season tire featuring an all-terrain tread that can handle all types of weather and road conditions. From rocky terrains to snowy paths to wooded trails, the Trail Hog provides excellent traction and responsiveness for all your off-road and overland adventures. Its heavily siped lugs and rugged beveled shoulder blocks deliver extra biting edges for enhanced steering and control. In addition, the Trail Hog A/T-4 is mountain snowflake rated and compatible with #16 winter studs for added traction in severe snow conditions.



Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.	Lbs.	
16	LTH1626575E	LT265/75R16	10PRLRE	18	31.8	10.7 on 7.5	7-8	52.3	90	123/120Q	3415/3085
	LTH1628575E	LT285/75R16	10PRLRE	18	32.9	11.5 on 8.0	7.5 - 9.0	52.3	90	126/123Q	3750/3415
17	LTH1723580E	LT235/80R17	10PRLRE	18	31.9	9.2 on 6.5	6-7.5	48.2	90	120/117Q	3085/2835
	LTH1724570E	LT245/70R17	10PRLRE	18	30.6	9.8 on 7	6.5-8.0	47.4	90	119/116Q	3000/2755
	LTH1724575E	LT245/75R17	10PRLRE	18	31.6	9.8 on 7	6.5-7.5	49.2	80	121/118Q	3195/2910
	LTH1726570E	LT265/70R17	10PRLRE	18	31.7	10.6 on 8	7-8.5	52.1	80	121/118Q	3195/2910
	LTH1728570E	LT285/70R17	10PRLRE	18	32.8	11.5 on 8.5	7.5-9	57.0	80	123/120Q	3465/3120
	LTH1730570E	LT305/70R17	10PRLRE	18	34.0	12.3 on 9	8-9.5	63.3	80	121/118Q	3195/2910
	LTH1731570E	LT315/70R17	10PRLRE	18	34.5	12.7 on 9.5	8-9.5	65.4	80	121/118Q	3195/2910
18	LTH1735125E	35X12.50R17LT	10PRLRE	18	34.6	12.8 on 10	8.5-11	64.5	80	121Q	3195
	LTH1737125E	37X12.50R17LT	10PRLRE	18	36.7	13.0 on 10	8.5-11	72.5	80	124Q	3525
	LTH1826570E	LT265/70R18	10PRLRE	18	32.7	10.7 on 8	7-9	54.3	90	124/121Q	3525/3195
	LTH1827565E	LT275/65R18	10PRLRE	18	32.3	10.9 on 8	7.5-9	55.0	80	123/120Q	3415/3085
	LTH1827570E	LT275/70R18	10PRLRE	18	33.4	10.9 on 8	7-8.5	57.3	80	125/122Q	3640/3305
	LTH1830570E	LT305/70R18	10PRLRE	18	34.9	12.4 on 9	8.5-10	67.1	80	126/123Q	3750/3415
20	LTH1837125E	37X12.50R18LT	10PRLRE	18	36.7	12.9 on 10	8.5-11	72.1	80	128Q	3970
	LTH2026560E	LT265/60R20	10PRLRE	18	32.5	10.7 on 8	7.5-9.5	55.2	80	121/118Q	3195/2910
	LTH2027555E	LT275/55R20	10PRLRE	18	32.0	11.2 on 8.5	7.5-9.5	55.5	80	120/117Q	3085/2835
	LTH2027560E	LT275/60R20	10PRLRE	18	33.0	11 on 8	7.5-9.5	57.1	80	123/120Q	3415/3085
	LTH2027565E	LT275/65R20	10PRLRE	18	34.3	10.8 on 8	7.5-9.5	59.2	80	126/123Q	3750/3415
	LTH2028560E	LT285/60R20	10PRLRE	18	33.5	11.5 on 8.5	8-10	59.8	80	125/122Q	3640/3305
	LTH2030555E	LT305/55R20	10PRLRE	18	33.3	12.4 on 9.5	8.5-10	63.4	80	121/118Q	3195/2910
	LTH2032560E	LT325/60R20	10PRLRE	18	35.4	13.1 on 9.5	9-12	71.2	80	126/123Q	3750/3415
20	LTH2035125E	35X12.50R20LT	10PRLRE	18	34.7	12.5 on 10	8.5-11	66.6	80	121Q	3195
	LTH2037125E	37X12.50R20LT	10PRLRE	18	36.7	12.7 on 10	8.5-11	71.3	80	126Q	3750

■ **SNOW FLAKE RATED / #16 STUDS**
FOR GREATER TRACTION IN WINTER CONDITIONS



■ **TOUGH 3-PLY SIDEWALL CONSTRUCTION**
FOR DURABILITY

■ **AGGRESSIVE TREAD DESIGN**
FOR SUPERIOR TRACTION AND CONTROL

■ **OPTIMIZED VOID RATIO**
FOR SMOOTH AND QUIET RIDE

STREET PERFORMANCE

6

OFF-ROAD PERFORMANCE

8

QUIET RIDE


6



NAVPOINT HTX®

ALL-SEASON HIGHWAY PERFORMANCE

Wheel Diameter	Part Number	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity
				32nd/Inch	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
16	LNV1622575E	LT225/75R16	10PR	16	29.3	8.8	6	40.2	80	115/112Q	2680/2470
	LNV1623585E	LT235/85R16	10PR	16	31.7	9.3	6.5	45.7	80	120/116R	3042/2756
	LNV1624575E	LT245/75R16	10PR	16	30.5	9.8	7	43.9	80	120/116S	3042/2756
	LNV1626575E	LT265/75R16	10PR	16	31.7	10.5	7.5	49.2	80	123/120R	3415/3085
	LNV1628575E	LT285/75R16	10PR	16	32.8	11.3	8	54.6	80	126/123R	3750/3415
17	LNV1723580E	LT235/80R17	10PR	16	31.8	9.3	6.5	45.9	80	120/117R	3065/2835
	LNV1724570E	LT245/70R17	10PR	16	30.6	9.8	7	45.0	80	119/116R	3000/2756
	LNV1724575E	LT245/75R17	10PR	16	31.5	9.8	7	46.20	80	121/118S	3195/2910
	LNV1725570SL	P255/70R17	SL	14	31.1	10.2	7.5	40.9	44	110T	2337
	LNV1726570E	LT265/70R17	10PR	16	31.7	10.7	8	49.6	80	121/118S	3195/2910
18	LNV1728570E	LT285/70R17	10PR	16	32.8	11.5	8.5	55.8	80	121/118S	3195/2910
	LNV1825565SL	255/65R18	SL	14	31.1	10.1	7.5	41.9	44	111T	2403
	LNV1826560SL	265/60R18	SL	14	30.5	10.7	8	41.8	44	110H	2335
	LNV1827565E	LT275/65R18	10PR	16	32.1	11.0	8	54.2	80	123/120S	3415/3085
	LNV1827570E	LT275/70R18	10PR	16	33.2	11.0	8	55.2	80	125/122R	3640/3305
20	LNV2025555XL	255/55R20	XL	14	31.0	10.4	8	44.1	50	110H	2337
	LNV2026560E	LT265/60R20	10PR	16	32.5	10.7	8	54.7	80	121/118S	3195/2910
	LNV2027555XL	275/55R20	XL	14	31.9	11.2	8.5	45.4	50	117H	2835
	LNV2027565E	LT275/65R20	10PR	16	34.1	11.0	8	57.6	80	126/123R	3750/3415
22	LNV2228545XL	285/45R22	XL	13	32.1	11.2	9.5	42.9	50	114H	2601

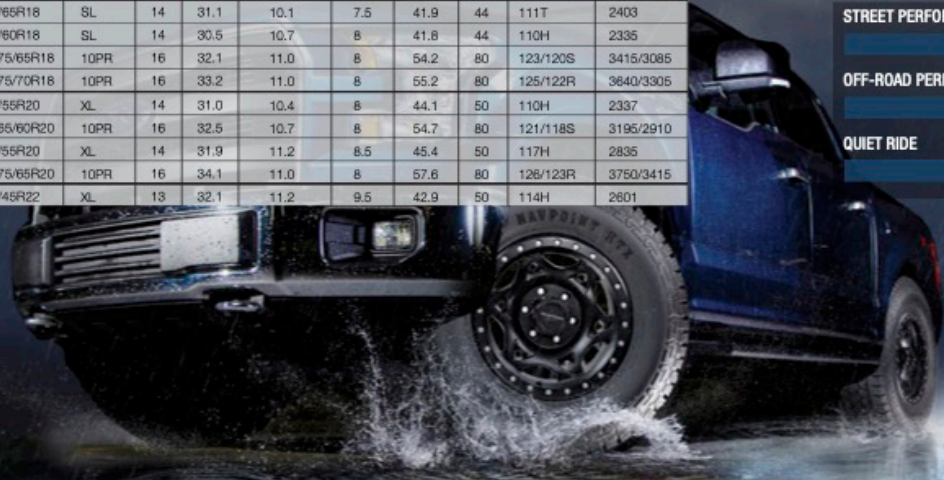

The new Kanati Navpoint HTX is a superior all-season highway-terrain tire made for light trucks, SUVs, and CUVs. With performance siping built in, the Navpoint HTX delivers extra flex and biting edges for enhanced grip and improved handling in adverse weather conditions. Two large circumferential grooves help expel water for increased traction on wet surfaces. Suitable for everyday driving and long-distance travel, the Navpoint HTX provides a smooth ride, excellent traction, and greater responsiveness in a variety of driving conditions.



- **CIRCUMFERENTIAL GROOVES**
FOR IMPROVED WATER EXPULSION
- **AGGRESSIVE CENTER TREAD**
FOR INCREASED TRACTION IN ADVERSE CONDITIONS
- **MULTIPLE ANGLED GROOVES**
FOR ENHANCED TRACTION IN WATER OR SNOW
- **CLOSED SHOULDER DESIGN**
FOR RELIABLE HANDLING AND GREATER STABILITY

STREET PERFORMANCE	10
OFF-ROAD PERFORMANCE	5
QUIET RIDE	9



DIRT COMMANDER M/T

BUILT TOUGH FOR ANY DESTINATION

Wheel Diameter	Item	Size	Ply Rating	Tread Depth	Overall Diameter	Section Width	Rim Width	Weight	PSI	Load Index/Speed Rating	Load Capacity
				32nd/3rd	Inches	Inches	Inches	Lbs.	Lbs.		Lbs.
15	TCD1523575C	LT235/75R15	6PR/LRC	18	29.1	9.0	6.0-(6.5)-8.0	37.6	50	104/101Q	1964/1819
	TCD1531105C	31X10.50R15LT	6PR/LRC	17	30.7	10.5	7.0-(8.5)-9.0	47.1	50	109Q	2271
	TCD1533125C	33X12.50R15LT	6PR/LRC	19	32.8	12.5	8.0-(10.0)-10.5	59.6	35	108Q	2205
16	TCD1623585E	LT235/85R16	10PR/LRE	16	31.7	9.3	6.0-(6.5)-7.5	45.4	80	120/116N	3066/2756
	TCD1624575E	LT245/75R16	10PR/LRE	15	30.5	9.5	6.5-(7.0)-8.0	43.9	80	120/116N	3066/2756
	TCD1626575E	LT265/75R16	10PR/LRE	16	31.9	10.1	7.0-(7.5)-9.0	46.5	80	123/120N	3417/3086
17	TCD1628575E	LT285/75R16	10PR/LRE	17	33.1	11.3	7.5-(8.0)-9.5	51.9	80	126/123N	3748/3417
	TCD1723580E	LT235/80R17	10PR/LRE	18	32.0	9.4	6.0-(6.5)-8.0	45.5	80	120/117Q	3066/2833
	TCD1724575E	LT245/75R17	10PR/LRE	18	31.7	9.5	6.5-(7.0)-8.0	45.3	80	121/118Q	3195/2910
18	TCD1726570E	LT265/70R17	10PR/LRE	16	31.9	10.9	7.0-(8.0)-9.0	49.7	80	121/118Q	3195/2910
	TCD1728570E	LT285/70R17	10PR/LRE	17	33.0	11.3	7.5-(8.5)-9.5	54.1	80	121/118Q	3195/2910
	TCD1729570E	LT295/70R17	10PR/LRE	17	33.5	11.8	7.5-(8.5)-10.0	58.7	80	121/118Q	3195/2910
19	TCD1733125D	33X12.50R17LT	8PR/LRD	19	32.8	12.7	8.5-(10.0)-11.0	55.7	50	114Q	2601
	TCD1735125F	35X12.50R17LT	12PR/LRF	18	34.8	12.7	8.0-(10.0)-10.5	64.1	80	121Q	3195
	TCD1827565E	LT275/65R18	10PR/LRE	18	32.3	10.9	8.0-(8.0)-9.5	51.2	80	123/120Q	3417/3086
20	TCD1827570E	LT275/70R18	10PR/LRE	17	33.4	11.0	7.0-(8.0)-9.0	54.1	80	121/118Q	3195/2190
	TCD1833125F	33X12.50R18LT	12PR/LRF	19	32.8	12.5	8.5-(10.0)-11.0	62.3	80	122Q	3305
	TCD1835125F	35X12.50R18LT	12PR/LRF	18	34.8	12.5	8.5-(10.0)-11.0	66.7	80	128Q	3970
21	TCD2033125F	33X12.50R20LT	12PR/LRF	19	32.8	12.5	8.5-(10.0)-11.0	59.5	80	119Q	3000
	TCD2035125F	35X12.50R20LT	12PR/LRF	18	34.8	12.5	8.5-(10.0)-11.0	66.9	80	125Q	3640
	TCD2037125F	37X12.50R20LT	12PR/LRF	19	36.8	12.5	8.5-(10.0)-11.0	71.7	80	129Q	4060
22	TCD2233125F	33X12.50R22LT	12PR/LRF	19	32.8	12.5	8.5-(10.0)-11.0	58.7	80	114Q	2600
	TCD2235125F	35X12.50R22LT	12PR/LRF	18	34.8	12.5	8.5-(10.0)-11.0	64.7	80	121Q	3195
	TCD2237135F	37X13.50R22LT	12PR/LRF	19	36.8	13.6	9.5-(11.0)-12.0	77.7	80	127Q	3860

The Dirt Commander M/T is a quality mud-terrain tire featuring an aggressive tread for optimum traction in various rough terrains. Its rugged lugs are strategically laid out to give you a wide stance for greater stability, and the broad shoulder lugs provide extra protection and biting force to conquer challenging obstacles. With an optimized void ratio, the Dirt Commander M/T performs well on and off the road. Available in 24 popular sizes to fit pickup trucks, jeeps, and SUVs.



- **AGGRESSIVE TREAD PATTERN**
FOR OPTIMUM TRACTION IN VARIOUS ROUGH TERRAINS
- **BROAD SHOULDER LUGS**
PROVIDE SHOULDER PROTECTION AND EXTRA BITING EDGES
- **WIDE CONTACT PATCH**
FOR EVEN WEAR AND GREATER LONGEVITY
- **STONE EJECTORS**
FOR EFFICIENT CLEAR-OUT
- **M+S RATED**

STREET PERFORMANCE

6

OFF-ROAD PERFORMANCE

9

QUIET RIDE

6